

Dell OptiPlex 5060 Micro

Setup and specifications guide



Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.


© 2018 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

| | |
|--|-----------|
| 1 Set up your computer..... | 5 |
| 2 Chassis..... | 8 |
| Front view..... | 8 |
| Back view..... | 9 |
| 3 System specifications..... | 10 |
| Processor..... | 10 |
| Memory..... | 11 |
| Storage..... | 11 |
| Chipset..... | 12 |
| Storage combinations..... | 12 |
| Audio..... | 13 |
| Video..... | 13 |
| Communications..... | 14 |
| Ports and connectors..... | 14 |
| System board connectors..... | 14 |
| Power supply..... | 15 |
| Physical system dimensions..... | 15 |
| Security..... | 15 |
| Environmental..... | 16 |
| 4 System setup..... | 17 |
| BIOS overview..... | 17 |
| General options..... | 18 |
| System information..... | 18 |
| Video screen options..... | 19 |
| Security..... | 20 |
| Secure boot options..... | 21 |
| Intel Software Guard Extensions options..... | 22 |
| Performance..... | 22 |
| Power management..... | 23 |
| Post behavior..... | 24 |
| Manageability..... | 24 |
| Virtualization support..... | 24 |
| Wireless options..... | 25 |
| Maintenance..... | 25 |
| System logs..... | 26 |
| System logs..... | 26 |
| Advanced configuration..... | 26 |
| 5 Software..... | 27 |
| Supported operating systems..... | 27 |


| | |
|------------------------------|-----------|
| Downloading drivers..... | 27 |
| Network adapter drivers..... | 28 |
| Audio drivers..... | 28 |
| Display adapter..... | 28 |
| Security drivers..... | 28 |
| Storage controller..... | 29 |
| System device drivers..... | 29 |
| Other device drivers..... | 30 |
| 6 Getting help..... | 32 |
| Contacting Dell..... | 32 |

Set up your computer


- 1 Connect the keyboard and mouse.

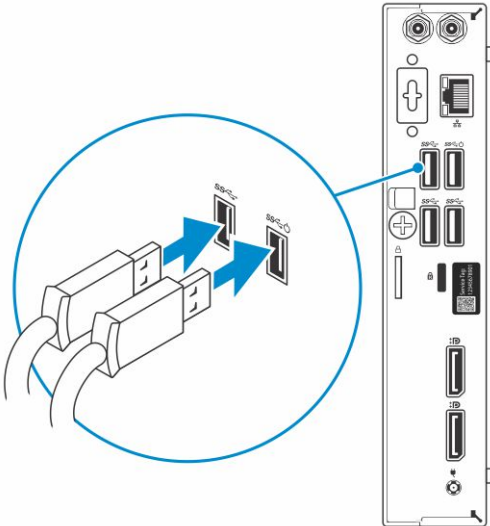

- 2 Connect to your network using a cable, or connect to a wireless network.

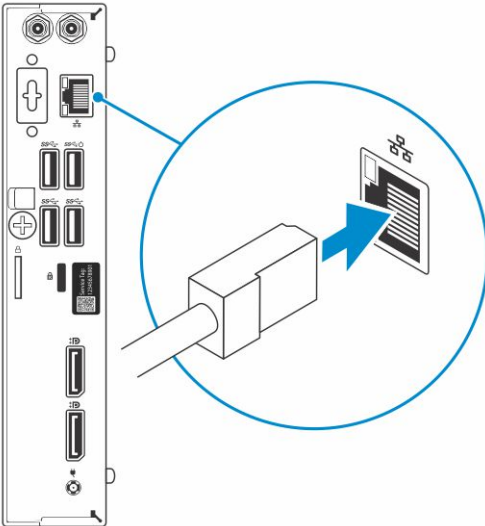


- 3 Connect the display.

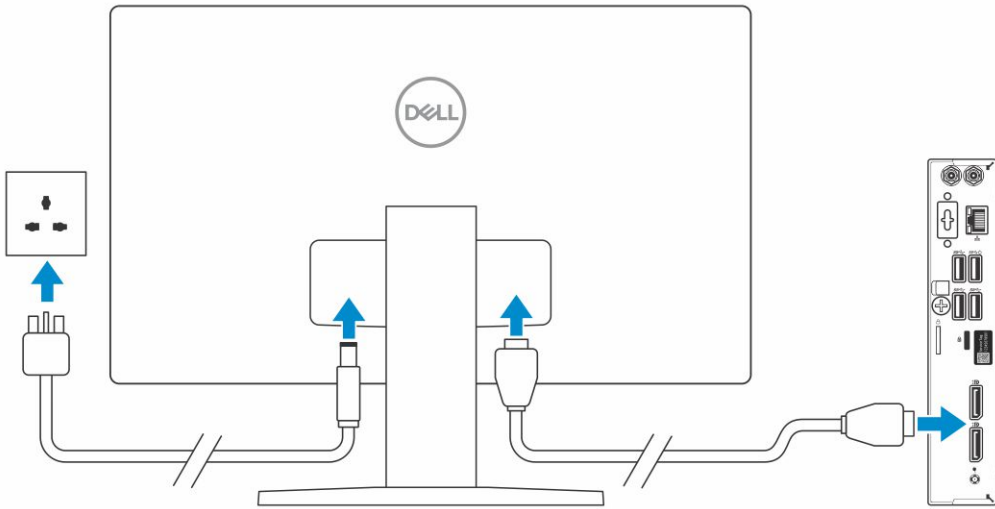


NOTE: If you ordered your computer with a discrete graphics card, the HDMI and the display ports on the back panel of your computer are covered. Connect the display to the discrete graphics card.

4 Connect the power cable.

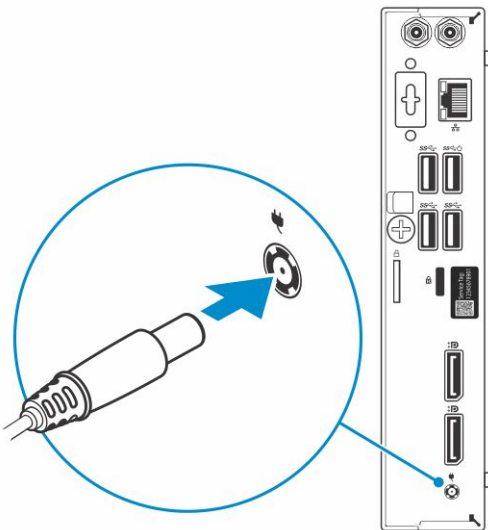


5 Press the power button.

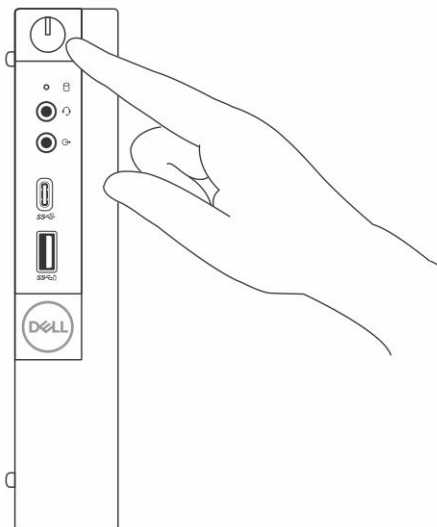


6 Follow the instructions on the screen to finish Windows setup:

- a Connect to a network.

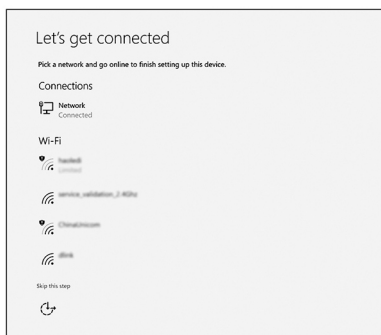

- b Sign-in to your Microsoft account or create a new account.

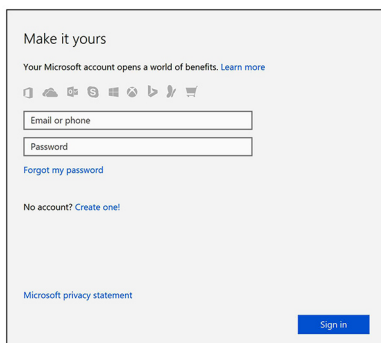


7 Locate Dell apps.

Table 1. Locate Dell apps



Register your computer

Dell Help & Support

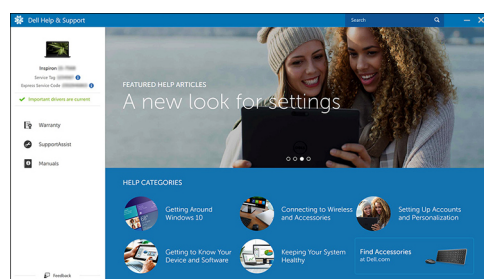

SupportAssist — Check and update your computer


Chassis

This chapter illustrates the multiple chassis views along with the ports and connectors and also explains the FN hot key combinations.

Topics:


- [Front view](#)
- [Back view](#)

Front view

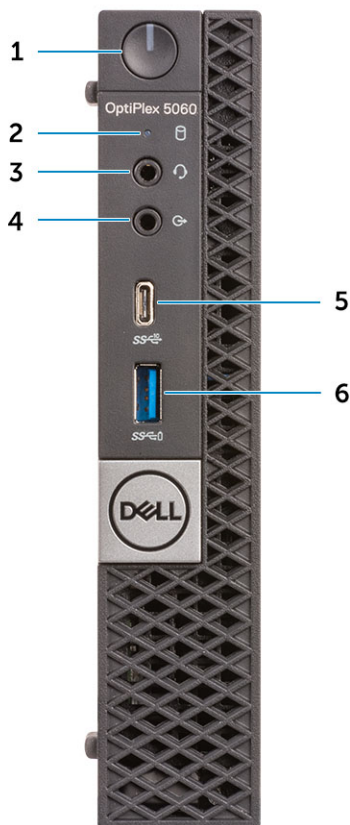

- | | | | |
|---|---|---|------------------------------------|
| 1 | Power button and power light | 2 | Hard drive activity light |
| 3 | Headset/Universal audio jack port | 4 | Line-out port |
| 5 | USB 3.1 Gen 2 Type-C port with PowerShare | 6 | USB 3.1 Gen 1 port with PowerShare |

Back view

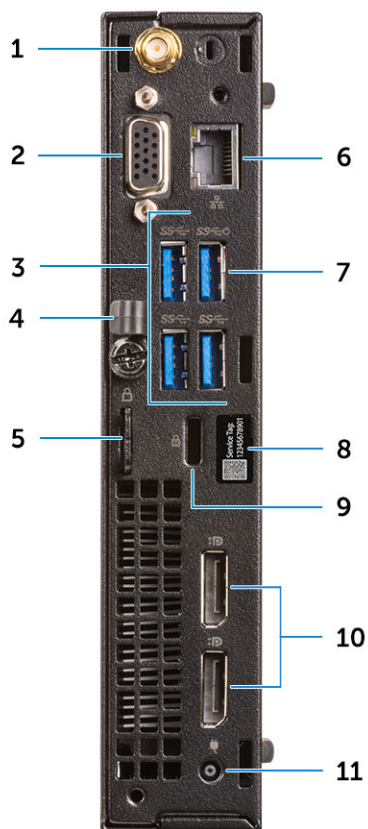

- | | | | |
|----|--|----|--|
| 1 | External antenna connectors (2) (optional) | 2 | DisplayPort/VGA/HDMI 2.0b/DP/ USB Type-C alt mode (optional) |
| 3 | USB 3.1 Gen 1 ports (3) | 4 | Cable holder |
| 5 | Padlock ring | 6 | Network port |
| 7 | USB 3.1 Gen 1 port (supports Smart Power On) | 8 | Service tag |
| 9 | Kensington security cable slot | 10 | DisplayPorts (2) |
| 11 | Power connector port | | |

System specifications

NOTE: Offerings may vary by region. The following specifications are only those required by law to ship with your computer. For more information about the configuration of your computer, go to Help and Support in your Windows operating system and select the option to view information about your computer.

Topics:

- [Processor](#)
- [Memory](#)
- [Storage](#)
- [Chipset](#)
- [Storage combinations](#)
- [Audio](#)
- [Video](#)
- [Communications](#)
- [Ports and connectors](#)
- [System board connectors](#)
- [Power supply](#)
- [Physical system dimensions](#)
- [Security](#)
- [Environmental](#)

Processor

Global Standard Products (GSP) are a subset of Dell's relationship products that are managed for availability and synchronized transitions on a worldwide basis. They ensure the same platform is available for purchase globally. This allows customers to reduce the number of configurations managed on a worldwide basis, thereby reducing their costs. They also enable companies to implement global IT standards by locking in specific product configurations worldwide. The following GSP processors identified below will be made available to Dell customers.

NOTE: Processor numbers are not a measure of performance. Processor availability is subject to change and may vary by region/country.

Table 2. Processor specifications

| Type | UMA Graphics |
|--|--|
| Intel Pentium Gold G5400T (2 Cores/4MB/4T/3.7GHz/65W); supports Windows 10/Linux | Intel UHD Graphics 610 with shared graphics memory |
| Intel Pentium Gold G5500T (2 Cores/4MB/4T/3.8GHz/65W); supports Windows 10/Linux | Intel UHD Graphics 610 with shared graphics memory |
| Intel Core i3-8100T (4 Cores/6MB/4T/3.6GHz/65W); supports Windows 10/Linux | Intel UHD Graphics 630 |

| Type | UMA Graphics |
|--|------------------------|
| Intel Core i3-8300T (4 Cores/8MB/4T/3.7GHz/65W); supports Windows 10/Linux | Intel UHD Graphics 630 |
| Intel Core i5-8400T (6 Cores/9MB/6T/up to 4.0GHz/65W); supports Windows 10/Linux | Intel UHD Graphics 630 |
| Intel Core i5-8500T (6 Cores/9MB/6T/up to 4.1GHz/65W); supports Windows 10/Linux | Intel UHD Graphics 630 |
| Intel Core i5-8600T (6 Cores/9MB/6T/up to 4.3GHz/65W); supports Windows 10/Linux | Intel UHD Graphics 630 |
| Intel Core i7-8700T (6 Cores/12MB/12T/up to 4.6GHz/65W); supports Windows 10/Linux | Intel UHD Graphics 630 |

Memory

Table 3. Memory specifications

| | |
|-----------------------------------|---|
| Minimum memory configuration | 4 GB |
| Maximum memory configuration | 32 GB |
| Number of slots | 2 SODIMM |
| Maximum memory supported per slot | 16 GB |
| Memory options | <ul style="list-style-type: none"> • 4 GB - 1 x 4 GB • 8 GB - 1 x 8 GB • 8 GB - 2 x 4 GB • 16 GB - 2 x 8 GB • 16 GB - 1 x 16 GB • 32 GB - 2 x 16 GB |
| Type | DDR4 DRAM Non-ECC memory |
| Speed | <ul style="list-style-type: none"> • 2666 MHz on i5 and i7 processors • 2400 MHz on Celeron, Pentium, and i3 processor |

Storage

Table 4. Storage specifications

| Type | Form factor | Interface | Capacity |
|-----------------------------|-------------|--|--|
| One Solid-State Drive (SSD) | M.2 2280 | <ul style="list-style-type: none"> • SATA Class 20 Solid State Drive • PCIe Class 40 Solid State Drive • PCIe NVMe Class 40 Solid State Drive | <ul style="list-style-type: none"> • Upto 512 GB • Upto 1 TB • Upto 512 GB • Upto 512 GB • Upto 256 GB • Upto 512 GB |

| Type | Form factor | Interface | Capacity |
|---|-------------|--|---|
| One 2.5 inch Hard-Disk Drive (HDD) | | <ul style="list-style-type: none"> SATA Class 20 Self Encrypting Opal 2.0 Solid State Drive PCIe NVMe Class 40 Self Encrypting Opal 2.0 Solid State Drive Class 20 Self Encrypting Opal 2.0 Solid State Drive | |
| | | <ul style="list-style-type: none"> SATA 5400 RPM Hard Disk Drive SATA 5400 RPM 8GB NAND Hybrid Hard Disk Drive SATA 7200 RPM Hard Disk Drive | <ul style="list-style-type: none"> Upto 2 TB Upto 1 TB Upto 1 TB |
| | | 7200 RPM FIPS Self Encrypting Opal 2.0 Hard Disk Drive | Upto 500 GB |
| One 2.5 inch Self-encrypting Opal drive Hard-Disk Drive (SED HDD) | | | |

Chipset

Table 5. Chipset specifications

| | |
|--|---|
| Type | Intel Q370 |
| Non-volatile memory on chipset | Yes |
| BIOS configuration SPI (Serial Peripheral Interface) | 256 Mbit (32 MB) located at SPI_FLASH on chipset |
| Trusted Platform Module (TPM) 2.0 Security Device (Discrete TPM Enabled) | 24 KB located at TPM 2.0 on chipset |
| Firmware-TPM (Discrete TPM disabled) | By default the Platform Trust Technology feature is visible to the OS |
| NIC EEPROM | LOM configuration contained within LOM e-fuse – no dedicated LOM EEPROM |

Storage combinations

Table 6. Storage combinations

| Primary/Boot drive | Secondary drive |
|----------------------------------|---|
| 1 x M.2 Drive | Intel Optane Memory |
| 1 x 2.5 inch HDD with M.2 Optane | 2.5 500 GB 7200 RPM HDD + Intel Optane Memory |
| 1 x 2.5 inch HDD with M.2 Optane | 2.5 1 TB 7200 RPM HDD + Intel Optane Memory |
| 1 x 2.5 inch HDD with M.2 Optane | 2.5 2 TB 5400 RPM HDD + Intel Optane Memory |

Audio

Table 7. Audio specifications

| | |
|----------------------------|---|
| Controller | Realtek ALC3234 |
| Type | Integrated |
| Speakers | Internal speaker (mono) |
| Interface | <ul style="list-style-type: none"> • Dell 2.0 Speaker System - AE215 (optional) • Dell 2.1 Speaker System - AE415 (optional) • Dell AX210 USB Stereo speakers (optional) • Dell Wireless 360 Speaker System - AE715 (optional) • AC511 Sound Bar (optional) • Dell Professional Sound Bar - AE515 (optional) • Dell Stereo Soundbar - AX510 (optional) • Dell Performance USB Headset - AE2 (optional) • Dell Pro Stereo Headsets - UC150/UC350 (optional) |
| Internal speaker amplifier | 2W (RMS) per channel |

Video

Table 8. Video

| Controller | Type | CPU Dependency | Graphics memory type | Capacity | External display support | Maximum resolution |
|------------------------|------|---------------------------|----------------------|----------------------|-----------------------------|---|
| Intel UHD Graphics 610 | UMA | Intel Pentium Gold G5400T | Integrated | Shared system memory | DisplayPort 1.2 HDMI 2.0 | VGA: 1920x1200@60 Hz |
| | | Intel Pentium Gold G5500T | | | | DisplayPort: 4096x2160@60 Hz HDMI : 2560x1600; 4096x2160@60 Hz |
| Intel UHD Graphics 630 | UMA | Intel Core i3-8100T | Integrated | Shared system memory | DisplayPort 1.2 HDMI 2.0 | VGA: 1920x1200@60 Hz |
| | | Intel Core i3-8300T | | | | DisplayPort: 4096x2160@60 Hz |
| | | Intel Core i5-8400T | | | | HDMI : 2560x1600; 4096x2160@60 Hz |
| | | Intel Core i5-8500T | | | | |
| | | Intel Core i7-8700T | | | | |

Communications

Table 9. Communications

| | |
|-----------------|--|
| Network adapter | Intel i219-V Gigabit1 Ethernet LAN 10/100/1000 (Remote Wake Up, PXE support) |
| Wireless | <ul style="list-style-type: none">Qualcomm QCA9377 Dual-band 1x1 802.11ac Wireless with MU-MIMO + Bluetooth 4.1Qualcomm QCA61x4A Dual-band 2x2 802.11ac Wireless with MU-MIMO + Bluetooth 4.2Intel Wireless-AC 9560, Dual-band 2x2 802.11ac Wi-Fi with MU-MIMO + Bluetooth 5 |

Ports and connectors

Table 10. Ports and connectors

| | |
|-----------------|--|
| USB | <ul style="list-style-type: none">Three USB 3.1 Gen 1 portsOne USB 3.1 Gen 1 (SmartPower On) portOne USB 3.1 Gen 1 PowerShare portOne USB 3.1 Gen 2 Type-C with PowerShare port |
| Security | Kensington lock slot |
| Audio | <ul style="list-style-type: none">Headset port/Universal audio jack portOne line-out port |
| Video | <ul style="list-style-type: none">DisplayPort 1.2HDMI 2.0, DP, VGA, USB Type-C (with DP Alt Mode)—optional |
| Network adapter | One RJ-45 (10/100/1000) connector |

System board connectors

Table 11. System board connectors

| | |
|-----------------------------|--|
| M.2 Connectors | 1 - 2230/2280 (Support SATA & PCIe interface) |
| M.2 Connectors | 1 - 2230 (keyed to support Integrated or Discrete WiFi, Support Intel CNVi or USB2.0/PCIe) |
| Serial ATA (SATA) connector | 1 (Support Standard Rev 3.0) |

Power supply

Table 12. Power supply

| | |
|-------------------------|--------------------------|
| Input Voltage | 90-264 VAC, 47 Hz/63 Hz |
| Input current (maximum) | • 90 W PSU (EPS Level V) |

Physical system dimensions

Table 13. Physical system dimensions

| | |
|-------------------------------------|-----------|
| Chassis volume (liters) | 1.16 |
| Chassis weight (pounds / kilograms) | 2.60/1.18 |

Table 14. Chassis dimensions

| | |
|---|-----------|
| Height (inches / centimeters) | 7.2/18.2 |
| Width (inches / centimeters) | 1.4/3.6 |
| Depth (inches / centimeters) | 7/17.8 |
| Shipping weight (pounds / kilograms – includes packaging materials) | 5.91/2.68 |

Table 15. Packaging parameters

| | |
|-------------------------------|-----------|
| Height (inches / centimeters) | 5.2/13.3 |
| Width (inches / centimeters) | 9.4/23.8 |
| Depth (inches / centimeters) | 19.6/49.8 |

Security

Table 16. Security

| Tower/ Small form factor/ Micro | |
|-----------------------------------|------------------------------------|
| Trusted Platform Module (TPM) 2.0 | Integrated on system board |
| Firmware TPM | Optional |
| Windows Hello support | Optional via security input device |
| Cable Cover | Optional |
| Chassis Intrusion Switch | Optional /Optional /Standard |
| Dell Smartcard Keyboard | Optional |

| | |
|------------------------------------|----------|
| Chassis lock slot and loop support | Standard |
|------------------------------------|----------|

Environmental

NOTE: For more details on Dell environmental features, please go to the environmental attributes section. See your specific region for availability.

Table 17. Environmental

| | |
|-------------------------------|-------------------|
| Energy efficient power supply | Standard |
| Customer replaceable unit | No |
| Recyclable packaging | Yes |
| MultiPack packaging | Optional, US only |

System setup

System setup enables you to manage your desktop hardware and specify BIOS level options. From the System setup, you can:

- Change the NVRAM settings after you add or remove hardware
- View the system hardware configuration
- Enable or disable integrated devices
- Set performance and power management thresholds
- Manage your computer security

Topics:

- [BIOS overview](#)
- [General options](#)
- [System information](#)
- [Video screen options](#)
- [Security](#)
- [Secure boot options](#)
- [Intel Software Guard Extensions options](#)
- [Performance](#)
- [Power management](#)
- [Post behavior](#)
- [Manageability](#)
- [Virtualization support](#)
- [Wireless options](#)
- [Maintenance](#)
- [System logs](#)
- [System logs](#)
- [Advanced configuration](#)

BIOS overview

CAUTION: Unless you are an expert computer user, do not change the settings in the BIOS Setup program. Certain changes can make your computer work incorrectly.

NOTE: Before you change BIOS Setup program, it is recommended that you write down the BIOS Setup program screen information for future reference.

Use the BIOS Setup program for the following purposes:

- Get information about the hardware installed in your computer, such as the amount of RAM and the size of the hard drive.
- Change the system configuration information.
- Set or change a user-selectable option, such as the user password, type of hard drive installed, and enabling or disabling base devices.

General options

Table 18. General

| Option | Description |
|-------------------------|--|
| System Information | <p>Displays the following information:</p> <ul style="list-style-type: none">• System Information: Displays BIOS Version, Service Tag, Asset Tag, Ownership Tag, Ownership Date, Manufacture Date, and the Express Service Code.• Memory Information: Displays Memory Installed, Memory Available, Memory Speed, Memory Channel Mode, Memory Technology, DIMM 1 Size, and DIMM 2 Size.• PCI Information: Displays Slot1_M.2, Slot2_M.2• Processor Information: Displays Processor Type, Core Count, Processor ID, Current Clock Speed, Minimum Clock Speed, Maximum Clock Speed, Processor L2 Cache, Processor L3 Cache, HT Capable, and 64-Bit Technology.• Device Information: Displays SATA-0, , , SATA 4, M.2 PCIe SSD-0, LOM MAC Address, Video Controller, Audio Controller, Wi-Fi Device, and Bluetooth Device. |
| Boot Sequence | <p>Allows you to specify the order in which the computer attempts to find an operating system from the devices specified in this list.</p> |
| Advanced Boot Options | <p>Allows you to select the Enable Legacy Option ROMs option, when in UEFI boot mode. By default, this option is selected.</p> <ul style="list-style-type: none">• Enable Legacy Option ROMs—Default• Enable Attempt Legacy Boot |
| UEFI Boot Path Security | <p>This option controls whether or not the system will prompt the user to enter the Admin password when booting a UEFI boot path from the F12 Boot Menu.</p> <ul style="list-style-type: none">• Always, Except Internal HDD—Default• Always• Never |
| Date/Time | <p>Allows you to set the date and time settings. Changes to the system date and time take effect immediately.</p> |
| . | |

System information

Table 19. System Configuration

| Option | Description |
|----------------|---|
| Integrated NIC | <p>Allows you to control the on-board LAN controller. The option 'Enable UEFI Network Stack' is not selected by default. The options are:</p> <ul style="list-style-type: none">• Disabled• Enabled• Enabled w/PXE (default) <p>NOTE: Depending on the computer and its installed devices, the items listed in this section may or may not appear.</p> |
| SATA Operation | <p>Allows you to configure the operating mode of the integrated hard drive controller.</p> <ul style="list-style-type: none">• Disabled = The SATA controllers are hidden |

| Option | Description |
|-------------------------|---|
| | <ul style="list-style-type: none"> AHCI = SATA is configured for AHCI mode RAID ON = SATA is configured to support RAID mode (selected by default) |
| Drives | <p>Allows you to enable or disable the various drives on-board:</p> <ul style="list-style-type: none"> SATA-0 (enabled by default) SATA-4 M.2 PCIe SSD-0 |
| Smart Reporting | <p>This field controls whether hard drive errors for integrated drives are reported during system startup. The Enable Smart Reporting option is disabled by default.</p> |
| USB Configuration | <p>Allows you to enable or disable the integrated USB controller for:</p> <ul style="list-style-type: none"> Enable USB Boot Support Enable Front USB Ports Enable Rear USB Ports <p>All the options are enabled by default.</p> |
| Front USB Configuration | <p>Allows you to enable or disable the front USB ports. All the ports are enabled by default.</p> |
| Rear USB Configuration | <p>Allows you to enable or disable the back USB ports. All the ports are enabled by default.</p> |
| USB PowerShare | <p>This option allows you to charge the external devices, such as mobile phones, music player. This option is disabled by default.</p> |
| Audio | <p>Allows you to enable or disable the integrated audio controller. The option Enable Audio is selected by default.</p> <ul style="list-style-type: none"> Enable Microphone Enable Internal Speaker <p>Both the options are selected by default.</p> |
| Dust Filter Maintenance | <p>Allows you to enable or disable BIOS messages for maintaining the optional dust filter installed in your computer. BIOS will generate a pre-boot reminder to clean or replace the dust filter based on the interval set. The option Disabled is selected by default.</p> <ul style="list-style-type: none"> Disabled 15 days 30 days 60 days 90 days 120 days 150 days 180 days |

Video screen options

Table 20. Video

| Option | Description |
|-----------------|---|
| Primary Display | <p>Allows you to select the primary display when multiple controllers are available in the system.</p> <ul style="list-style-type: none"> Auto (default) |

| Option | Description |
|--------|--|
| | <ul style="list-style-type: none"> Intel HD Graphics <p>i NOTE: If you do not select Auto, the on-board graphics device will be present and enabled.</p> |

Security

Table 21. Security

| Option | Description |
|-------------------------------|--|
| Admin Password | Allows you to set, change, and delete the admin password. |
| System Password | Allows you to set, change, and delete the system password. |
| Internal HDD-0 Password | Allows you to set, change, and delete the computer's internal HDD. |
| Strong Password | This option lets you enable or disable strong passwords for the system. |
| Password Configuration | Allows you to control the minimum and maximum number of characters allowed for a administrative password and the system password. The range of characters is between 4 and 32. |
| Password Bypass | <p>This option lets you bypass the System (Boot) Password and the internal HDD password prompts during a system restart.</p> <ul style="list-style-type: none"> Disabled — Always prompt for the system and internal HDD password when they are set. This option is disabled by default. Reboot Bypass — Bypass the password prompts on Restarts (warm boots). <p>i NOTE: The system will always prompt for the system and internal HDD passwords when powered on from the off state (a cold boot). Also, the system will always prompt for passwords on any module bay HDDs that may be present.</p> |
| Password Change | <p>This option lets you determine whether changes to the System and Hard Disk passwords are permitted when an administrator password is set.</p> <p>Allow Non-Admin Password Changes - This option is enabled by default.</p> |
| UEFI Capsule Firmware Updates | This option controls whether this system allows BIOS updates via UEFI capsule update packages. This option is selected by default. Disabling this option will block BIOS updates from services such as Microsoft Windows Update and Linux Vendor Firmware Service (LVFS) |
| TPM 2.0 Security | <p>Allows you to control whether the Trusted Platform Module (TPM) is visible to the operating system.</p> <ul style="list-style-type: none"> TPM On (default) Clear PPI Bypass for Enable Commands PPI Bypass for Disable Commands PPI Bypass for Clear Commands Attestation Enable (default) Key Storage Enable (default) SHA-256 (default) <p>Choose any one option:</p> <ul style="list-style-type: none"> Disabled Enabled (default) |
| Computrace | <p>This field lets you Activate or Disable the BIOS module interface of the optional Computrace Service from Absolute Software. Enables or disables the optional Computrace service designed for asset management.</p> <ul style="list-style-type: none"> Deactivate |

| Option | Description |
|-------------------------|--|
| | <ul style="list-style-type: none"> • Disable • Activate - This option is selected by default. |
| Chassis Intrusion | <p>This field controls the chassis intrusion feature. Choose any one of the option:</p> <ul style="list-style-type: none"> • Disabled (default) • Enabled • On-Silent |
| Admin Setup Lockout | Allows you to prevent users from entering Setup when Admin password is set. This option is not set by default. |
| Master Password Lockout | Allows you to disable master password support Hard Disk passwords need to be cleared before the settings can be changed. This option is not set by default. |
| SMM Security Mitigation | Allows you to enable or disable additional UEFI SMM Security Mitigation protections. This option is not set by default. |

Secure boot options

Table 22. Secure Boot

| Option | Description |
|-----------------------|---|
| Secure Boot Enable | <p>Allows you to enable or disable Secure Boot feature</p> <ul style="list-style-type: none"> • Secure Boot Enable <p>This option is not selected by default.</p> |
| Secure Boot Mode | <p>Allows you to modify the behavior of Secure Boot to allow evaluation or enforcement of UEFI driver signatures.</p> <ul style="list-style-type: none"> • Deployed Mode (default) • Audit Mode |
| Expert key Management | <p>Allows you to manipulate the security key databases only if the system is in Custom Mode. The Enable Custom Mode option is disabled by default. The options are:</p> <ul style="list-style-type: none"> • PK (default) • KEK • db • dbx <p>If you enable the Custom Mode, the relevant options for PK, KEK, db, and dbx appear. The options are:</p> <ul style="list-style-type: none"> • Save to File- Saves the key to a user-selected file • Replace from File- Replaces the current key with a key from a user-selected file • Append from File- Adds a key to the current database from a user-selected file • Delete- Deletes the selected key • Reset All Keys- Resets to default setting • Delete All Keys- Deletes all the keys <p>NOTE: If you disable the Custom Mode, all the changes made will be erased and the keys will restore to default settings.</p> |

Intel Software Guard Extensions options

Table 23. Intel Software Guard Extensions

| Option | Description |
|---------------------|---|
| Intel SGX Enable | <p>This field specifies you to provide a secured environment for running code/storing sensitive information in the context of the main OS.</p> <p>Click one of the following options:</p> <ul style="list-style-type: none">• Disabled• Enabled• Software controlled—Default |
| Enclave Memory Size | <p>This option sets SGX Enclave Reserve Memory Size</p> <p>Click one of the following options:</p> <ul style="list-style-type: none">• 32 MB• 64 MB• 128 MB—Default |

Performance

Table 24. Performance

| Option | Description |
|--------------------|--|
| Multi Core Support | <p>This field specifies whether the process has one or all cores enabled. The performance of some applications improves with the additional cores.</p> <ul style="list-style-type: none">• All—Default• 1• 2• 3 |
| Intel SpeedStep | <p>Allows you to enable or disable the Intel SpeedStep mode of processor.</p> <ul style="list-style-type: none">• Enable Intel SpeedStep <p>This option is set by default.</p> |
| C-States Control | <p>Allows you to enable or disable the additional processor sleep states.</p> <ul style="list-style-type: none">• C states <p>This option is set by default.</p> |
| Intel TurboBoost | <p>Allows you to enable or disable the Intel TurboBoost mode of the processor.</p> <ul style="list-style-type: none">• Enable Intel TurboBoost <p>This option is set by default.</p> |

| Option | Description |
|----------------------|---|
| Hyper-Thread Control | <p>Allows you to enable or disable the HyperThreading in the processor.</p> <ul style="list-style-type: none"> • Disabled • Enabled—Default |

Power management

Table 25. Power Management

| Option | Description |
|-------------------------------------|---|
| AC Recovery | <p>Determines how the system responds when AC power is re-applied after a power loss. You can set the AC Recovery to:</p> <ul style="list-style-type: none"> • Power Off • Power On • Last Power State <p>This option is Power Off by default.</p> |
| Enable Intel Speed Shift Technology | <p>Allows you to enable or disable Intel Speed Shift Technology support. The option Enable Intel Speed Shift Technology is set by default.</p> |
| Auto On Time | <p>Sets time to automatically turn on the computer. Time is kept in standard 12-hour format (hour:minutes:seconds). Change the startup time by typing the values in the time and AM/PM fields.</p> <p>i NOTE: This feature does not work if you turn off your computer using the switch on a power strip or surge protector or if Auto Power is set to disabled.</p> |
| Deep Sleep Control | <p>Allows you to define the controls when Deep Sleep is enabled.</p> <ul style="list-style-type: none"> • Disabled • Enabled in S5 only • Enabled in S4 and S5 <p>This option is Enabled in S4 and S5 by default.</p> |
| USB Wake Support | <p>Allows you to enable the USB devices to wake the computer from standby mode. The option "Enable USB Wake Support" is selected by default</p> |
| Wake on LAN/WWAN | <p>This option allows the computer to power up from the off state when triggered by a special LAN signal. This feature only works when the computer is connected to AC power supply.</p> <ul style="list-style-type: none"> • Disabled - Does not allows the system to power on by special LAN signals when it receives a wake-up signal from the LAN or wireless LAN. • LAN or WLAN - Allows the system to be powered on by special LAN or wireless LAN signals. • LAN Only - Allows the system to be powered on by special LAN signals. • LAN with PXE Boot - A wakeup packet sent to the system in either the S4 or S5 state, that will cause the system to wake-up and immediately boot to PXE. • WLAN Only - Allows the system to be powered on by special WLAN signals. <p>This option is Disabled by default.</p> |
| Block Sleep | <p>Allows you to block entering to sleep (S3 state) in OS environment. This option is disabled by default.</p> |

Post behavior

Table 26. POST Behavior

| Option | Description |
|-----------------------|---|
| Numlock LED | Allows you to enable or disable the Numlock feature when your computer starts. This option is enabled by default. |
| Keyboard Errors | Allows you to enable or disable the keyboard error reporting when the computer starts. The option Enable Keyboard Error Detection is enabled by default. |
| Fast Boot | <p>This option can speed up the boot process by bypassing some compatibility steps:</p> <ul style="list-style-type: none">Minimal — The system boots quickly, unless the BIOS has been updated, memory changed, or the previous POST did not complete.Thorough — The system does not skip any steps in the boot process.Auto — This allows the operating system to control this setting (this works only when the operating system supports Simple Boot Flag). <p>This option is set to Thorough by default.</p> |
| Extend BIOS POST Time | <p>This option creates an additional pre-boot delay.</p> <ul style="list-style-type: none">0 seconds (default)5 seconds10 seconds |
| Full Screen Logo | This option will display full screen logo if your image match screen resolution. The option Enable Full Screen Logo is not set by default. |
| Warnings and Errors | <p>This option causes the boot process to only pause when warning or errors are detected. Choose any one of the option:</p> <ul style="list-style-type: none">Prompt on Warnings and ErrorsContinue on WarningsContinue on Warnings and Errors |

Manageability

Table 27. Manageability

| Option | Description |
|---------------|---|
| USB provision | This option is not selected by default. |
| MEBx Hotkey | This option is selected by default. |

Virtualization support

Table 28. Virtualization Support

| Option | Description |
|----------------|--|
| Virtualization | <p>This option specifies whether a Virtual Machine Monitor (VMM) can utilize the additional hardware capabilities provided by the Intel Virtualization technology.</p> <ul style="list-style-type: none">Enable Intel Virtualization Technology |

| Option | Description |
|-------------------|--|
| | This option is set by default. |
| VT for Direct I/O | <p>Enables or disables the Virtual Machine Monitor (VMM) from utilizing the additional hardware capabilities provided by the Intel Virtualization technology for direct I/O.</p> <ul style="list-style-type: none"> • Enable VT for Direct I/O <p>This option is set by default.</p> |
| Trusted Execution | <p>This option specifies whether a Measured Virtual Machine Monitor (MVMM) can utilize the additional hardware capabilities provided by Intel Trusted Execution Technology.</p> <ul style="list-style-type: none"> • Trusted Execution <p>This option is not set by default.</p> |

Wireless options

Table 29. Wireless

| Option | Description |
|------------------------|--|
| Wireless Device Enable | <p>Allows you to enable or disable the internal wireless devices.</p> <p>The options are:</p> <ul style="list-style-type: none"> • WLAN/WiGig • Bluetooth <p>All the options are enabled by default.</p> |

Maintenance

Table 30. Maintenance

| Option | Description |
|----------------|--|
| Service Tag | Displays the service tag of your computer. |
| Asset Tag | <p>Allows you to create a system asset tag if an asset tag is not already set.</p> <p>This option is not set by default.</p> |
| SERR Messages | Controls the SERR message mechanism. This option is set by default. Some graphics cards require that the SERR message mechanism be disabled. |
| BIOS Downgrade | <p>Allows you to flash previous revisions of the system firmware.</p> <ul style="list-style-type: none"> • Allow BIOS Downgrade <p>This option is set by default.</p> |
| Data Wipe | <p>Allows you to securely erase data from all internal storage devices.</p> <ul style="list-style-type: none"> • Wipe on Next Boot <p>This option is not set by default.</p> |

| Option | Description |
|---------------------|---|
| Bios Recovery | <p>BIOS Recovery from Hard Drive—This option is set by default. Allows you to recover the corrupted BIOS from a recovery file on the HDD or an external USB key.</p> <p>BIOS Auto-Recovery— Allows you to recover the BIOS automatically.</p> <p> NOTE: BIOS Recovery from Hard Drive field should be enabled.</p> <p>Always Perform Integrity Check—Performs integrity check on every boot.</p> |
| First Power On Date | Allows you the set Ownership date. The option Set Ownership Date is not set by default. |

System logs

Table 31. System Logs

| Option | Description |
|-------------|---|
| BIOS events | Allows you to view and clear the System Setup (BIOS) POST events. |

System logs

Table 32. System Logs

| Option | Description |
|-----------------------|---|
| BIOS events | Allows you to view and clear the System Setup (BIOS) POST events. |
| Thermal Events | Allows you to view and clear the System Setup (Thermal) events. |
| Power Events | Allows you to view and clear the System Setup (Power) events. |

Advanced configuration

Table 33. Advanced configuration

| Option | Description |
|--------|---|
| ASPM | <p>Allows you to set the ASPM level.</p> <ul style="list-style-type: none"> Auto (default) - There is handshaking between the device and PCI Express hub to determine the best ASPM mode supported by the device Disabled - ASPM power management is turned off at all time L1 Only - ASPM power management is set to use L1 |

Software

This chapter details the supported operating systems along with instructions on how to install the drivers.

Topics:

- Supported operating systems
- Downloading drivers
- Network adapter drivers
- Audio drivers
- Display adapter
- Security drivers
- Storage controller
- System device drivers
- Other device drivers

Supported operating systems

Table 34. Supported operating systems

| Supported operating systems | Description |
|-----------------------------|--|
| Windows operating system | <ul style="list-style-type: none"> • Microsoft Windows 10 Home (64-bit) • Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 10 Pro National Academic (64-bit) • Microsoft Windows 10 Home National Academic (64-bit) |
| Other | <ul style="list-style-type: none"> • Ubuntu 16.04 SP1 LTS (64-bit) • Neokylin v6.0 SP4 (China only) |

Downloading drivers


- 1 Turn on the desktop.
- 2 Go to **Dell.com/support**.
- 3 Click **Product Support**, enter the Service Tag of your desktop, and then click **Submit**.

NOTE: If you do not have the Service Tag, use the auto detect feature or manually browse for your desktop model.

- 4 Click **Drivers and Downloads**.
- 5 Select the operating system installed on your desktop.
- 6 Scroll down the page and select the driver to install.
- 7 Click **Download File** to download the driver for your desktop.
- 8 After the download is complete, navigate to the folder where you saved the driver file.
- 9 Double-click the driver file icon and follow the instructions on the screen.


Network adapter drivers

Verify if the Network adapter drivers are already installed in the system.

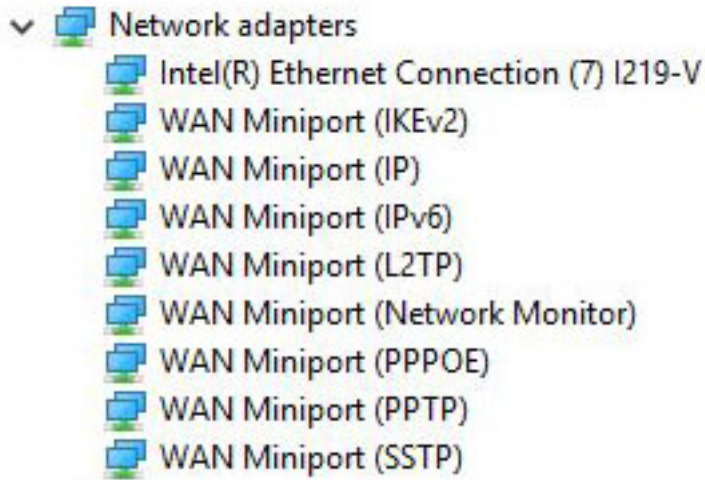


Audio drivers

Verify if the audio drivers are already installed in the computer.

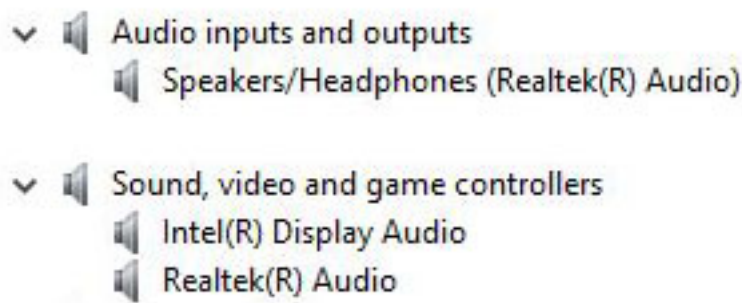

Display adapter

Verify if the display adapter drivers are already installed in the system.






Security drivers

Verify if the security drivers are already installed in the system.

- ▼  Security devices
 -  Trusted Platform Module 2.0













































Storage controller

Verify if the storage control drivers are already installed in the system.

- ▼  Storage controllers
 -  Intel(R) Chipset SATA/PCIe RST Premium Controller
 -  Microsoft Storage Spaces Controller

System device drivers



Verify if the system device drivers are already installed in the system.

- ▼  System devices
 -  ACPI Fan
 -  ACPI Fan
 -  ACPI Fan
 -  ACPI Fan
 -  ACPI Fan
 -  ACPI Fixed Feature Button
 -  ACPI Power Button
 -  ACPI Processor Aggregator
 -  ACPI Thermal Zone
 -  CannonLake LPC Controller (Q370) - A306
 -  CannonLake PCI Express Root Port #6 - A33D
 -  CannonLake SMBus - A323
 -  CannonLake SPI (flash) Controller - A324
 -  CannonLake Thermal Subsystem - A379
 -  Composite Bus Enumerator
 -  Dell Diag Control Device
 -  Dell System Analyzer Control Device
 -  High Definition Audio Controller
 -  High precision event timer
 -  Intel(R) Management Engine Interface
 -  Intel(R) Power Engine Plug-in
 -  Intel(R) Serial IO GPIO Host Controller - INT3450
 -  Intel(R) Serial IO I2C Host Controller - A368
 -  Intel(R) Xeon(R) E3 - 1200/1500 v5/6th Gen Intel(R) Core(TM) Gaussian Mixture Model - 1911
 -  Microsoft ACPI-Compliant System
 -  Microsoft System Management BIOS Driver
 -  Microsoft UEFI-Compliant System
 -  Microsoft Virtual Drive Enumerator
 -  Microsoft Windows Management Interface for ACPI
 -  Microsoft Windows Management Interface for ACPI
 -  Microsoft Windows Management Interface for ACPI
 -  Microsoft Windows Management Interface for ACPI
 -  NDIS Virtual Network Adapter Enumerator
 -  Numeric data processor
 -  PCI Express Root Complex
 -  PCI standard host CPU bridge
 -  PCI standard RAM Controller
 -  Plug and Play Software Device Enumerator
 -  Programmable interrupt controller
 -  Remote Desktop Device Redirector Bus
 -  System CMOS/real time clock
 -  System timer
 -  UMBus Root Bus Enumerator




Other device drivers

Verify if the following drivers are already installed in the system.

UCM Client

- ▼  UCMCLIENT
 -  Cypress UCM Client Peripheral Driver



Universal Serial Bus Controller

- ▼  Universal Serial Bus controllers
 -  Intel(R) USB 3.1 eXtensible Host Controller - 1.10 (Microsoft)
 -  USB Root Hub (USB 3.0)



Software components

- ▼  Software components
 -  Realtek Asio Component
 -  Realtek Audio Effects Component
 -  Realtek Audio Universal Service
 -  Waves Audio Effects Component



Ports (COM and LPT)

- ▼  Ports (COM & LPT)
 -  Communications Port (COM1)
 -  Intel(R) Active Management Technology - SOL (COM3)

Mice and other pointing devices

- ▼  Mice and other pointing devices
 -  HID-compliant mouse

Firmware

- ▼  Firmware
 -  System Firmware

Getting help

Contacting Dell

 **NOTE:** If you do not have an active Internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.

Dell provides several online and telephone-based support and service options. Availability varies by country and product, and some services may not be available in your area. To contact Dell for sales, technical support, or customer service issues:

- 1 Go to **Dell.com/support**.
- 2 Select your support category.
- 3 Verify your country or region in the **Choose a Country/Region** drop-down list at the bottom of the page.
- 4 Select the appropriate service or support link based on your need.