


OVERVIEW

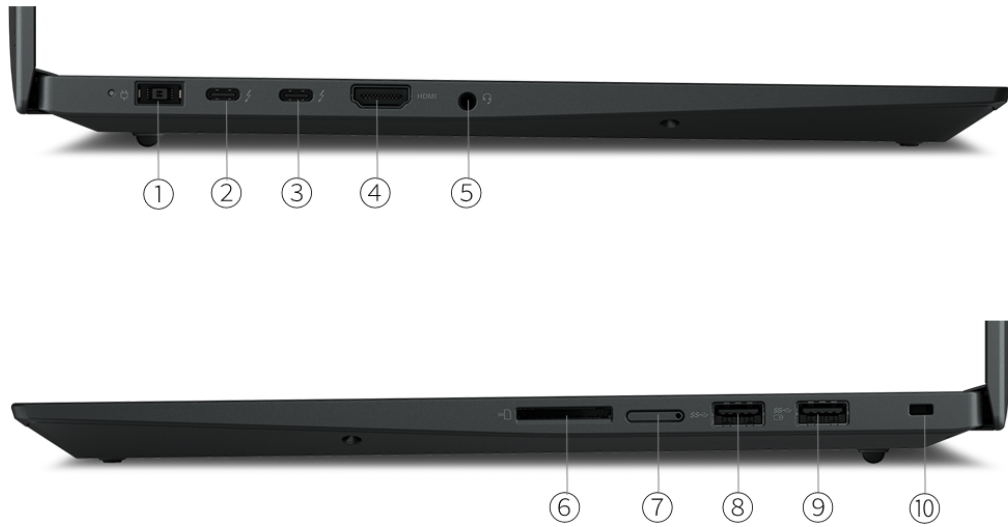

1. Power connector	6. SD Express 7.0 card reader
2. Thunderbolt 4	7. Nano-SIM card slot *
3. Thunderbolt 4	8. USB 3.2 Gen 1
4. HDMI	9. USB 3.2 Gen 1 (Always On)
5. Headphone (3.5mm)	10. Kensington Nano Security Slot

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

12th Generation H series Intel® Core™ i7 / i9 processor, supports processors up to 14 cores; up to 5.0 GHz; up to 45W TDP

Processor**^[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i7-12700H	14 (6 P-core + 8 E-core)	20	P-core 2.3GHz / E-core 1.7GHz	P-core 4.7GHz / E-core 3.5GHz	24MB	DDR5-4800	Intel Iris® Xe Graphics
Core i7-12800H	14 (6 P-core + 8 E-core)	20	P-core 2.4GHz / E-core 1.8GHz	P-core 4.8GHz / E-core 3.7GHz	24MB	DDR5-4800	Intel Iris Xe Graphics
Core i9-12900H	14 (6 P-core + 8 E-core)	20	P-core 2.5GHz / E-core 1.8GHz	P-core 5.0GHz / E-core 3.8GHz	24MB	DDR5-4800	Intel Iris Xe Graphics

Notes:

1. Intel Iris Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD Graphics.

Operating System

Operating System

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 Home 64 Single Language
- Windows 11 DG Windows 10 Pro 64
- Fedora Linux
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 8.6 (certified only, available in late 2022, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No operating system

Graphics

Graphics^[1]

Graphics	Type	Memory	TGP	Key Features
Intel Iris Xe Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1
NVIDIA® GeForce RTX™ 3070 Ti Laptop GPU	Discrete	8GB GDDR6	80W	Resizable BAR, Dynamic Boost 2.0, VR ready, DirectX 12
NVIDIA GeForce RTX 3080 Ti Laptop GPU	Discrete	16GB GDDR6	80W	Resizable BAR, Dynamic Boost 2.0, VR ready, DirectX 12
NVIDIA RTX A1000 Laptop GPU	Discrete	4GB GDDR6	35W	Dynamic Boost 2.0, DirectX 12
NVIDIA RTX A2000 8GB Laptop GPU	Discrete	8GB GDDR6	35W	Dynamic Boost 2.0, DirectX 12
NVIDIA RTX A3000 12 GB Laptop GPU	Discrete	12GB GDDR6 ECC	80W	Dynamic Boost 2.0, DirectX 12
NVIDIA RTX A4500 Laptop GPU	Discrete	16GB GDDR6 ECC	80W	Dynamic Boost 2.0, DirectX 12
NVIDIA RTX A5500 Laptop GPU	Discrete	16GB GDDR6 ECC	80W	Dynamic Boost 2.0, DirectX 12

Notes:

1. Intel Iris Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD graphics.
Vapor Chamber cooling is available only with NV RTX A3000 /A4500 / A5500 and GeForce RTX 3070 / 3080 GPUs.

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)

- HDMI supports up to 3840x2160@60Hz on Intel Iris Xe models; 7680x4320@60Hz on discrete NVIDIA graphics models
- Thunderbolt supports up to 5120x3200@60Hz

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 64GB DDR5-4800

Memory Slots

Two DDR5 SO-DIMM slots, dual-channel capable

Memory Type

DDR5-4800 non-ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

- Models with integrated graphics or NVIDIA RTX A1000/A2000: up to two drives, 2x M.2 SSD
 - M.2 2280 SSD up to 8TB, 4TB each
 - RAID 0/1 support
- Models with NVIDIA GeForce/RTX A3000/A4500/A5500: one drive, up to 4TB M.2 2280 SSD

Storage Slot

- Models with NVIDIA GeForce/RTX A3000/A4500/A5500: one M.2 2280 PCIe® Gen 4x4 slot, supports M.2 2280 SSD
- Models with Intel integrated graphics or NVIDIA RTX A1000/A2000: two M.2 2280 PCIe Gen 4x4 slots, supports M.2 2280 SSD

Storage Type^[2]

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4 Performance	-	512GB / 1TB / 2TB / 4TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	-	256GB / 512GB / 1TB	Opal2

RAID

- RAID 0/1 support (for models with integrated graphics or NVIDIA RTX A1000/A2000)
- No support

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. PCIe x4 SSD may be PCIe 3.0 x4 or PCIe 4.0 x4 as substitution.

Removable Storage

Card Reader

SD Express 7.0 card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3306 codec

Speakers

Stereo speakers, 2W x2, optimized with Dolby® Atmos®

Microphone

Dual array microphone, far-field, Dolby Voice

Camera**

- FHD 1080p, with privacy shutter, fixed focus
- IR & FHD 1080p hybrid, with privacy shutter, fixed focus
- No camera

Battery**Battery**

Integrated Li-Polymer 90Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Power Adapter**Power Adapter**[1]**

- 135W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 170W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 230W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz

Notes:

1. AC adapter offerings depend on the country.

DESIGN**Display****Display**[1]**

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
16.0"	WUXGA (1920x1200)	None	IPS	300 nits	Anti-glare	16:10	1200:1	100% sRGB	178°	Low Blue Light, X-Rite® Pantone® Factory Color Calibration, 86.42% screen to body ratio, DC dimming
16.0"	WQXGA (2560x1600)	None	IPS	500 nits	Anti-glare	16:10	1200:1	100% sRGB	178°	X-Rite Pantone Factory Color Calibration, 165Hz, Low blue light, 86.42% screen to body ratio, DC dimming
16.0"	WQUXGA (3840x2400)	None	IPS	600 nits	Anti-glare	16:10	1500:1	100% Adobe® RGB	170°	X-Rite Pantone Factory Color Calibration, Low blue light, Dolby Vision™, DisplayHDR™ 400, 86.08% screen to body ratio, DC dimming
16.0"	WQUXGA (3840x2400)	Multi-touch	IPS	600 nits	Anti-reflection, Anti-smudge	16:10	1500:1	100% Adobe RGB	170°	X-Rite Pantone Factory Color Calibration, Low blue light, Dolby Vision, DisplayHDR 400, 86.08% screen to body ratio, DC dimming

Color Calibration

X-Rite Pantone factory color calibration

Touchscreen

- OGM multi-touch, supports 10-point touch
- Non-touch

Notes:

- California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device**Pen**

- Lenovo Precision Pen 2 with built-in rechargeable battery, 4096 levels of pressure sensitivity, tilt detection, supports WGP, AES 2.0 and MPP 2.0 protocols. For more information, please read [Lenovo Precision Pen 2](#).
- No pen (pen sold separately)
- No support (non-touch display doesn't support pen input)

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

LED backlight

UltraNav™

3-button TrackPoint® pointing device and glass surface multi-touch touchpad, 67.6 x 115 mm (2.66 x 4.53 inches)

Mechanical^[1]**Dimensions (WxDxH)**

Models	Dimensions
Touch models	359.5 x 253.8 x 18.2 mm (14.15 x 9.99 x 0.72 inches)
Non-touch models	359.5 x 253.8 x 17.7 mm (14.15 x 9.99 x 0.7 inches)

Weight

Models	Weight
Non-touch models	1.81 kg (3.99 lbs)
Touch models	1.86 kg (4.1 lbs)

Case Color**

- Black
- 37-degree twill CF weave

Case Material**

- CFRP / GFRP (top), Aluminium (bottom)
- CFRP / GFRP hybrid (top), Aluminium (bottom)

Notes:

- The system dimensions and weight vary depending on configurations.

CONNECTIVITY**Network****Ethernet^[1]**

No onboard Ethernet

WLAN + Bluetooth^[2]

Intel Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1

WWAN

- Fibocom FM350-GL 5G NR module, M.2 Card, with embedded eSIM functionality
- No support

SIM Card

No SIM card inbox

NFC

- Near Field Communication

- No support

Notes:

1. Ethernet support via optional docking or Lenovo USB-C® to Ethernet Adapter
2. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

Ports^[1]

Standard Ports

- Models with NVIDIA graphics: 1x HDMI, up to 8K/60Hz
- Models with integrated graphics: 1x HDMI, up to 4K/60Hz
- 2x USB 3.2 Gen 1 (one Always On)
- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Power connector
- 1x SD Express 7.0 card reader

Optional Ports

1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via Thunderbolt or USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad® P1 Gen 5](#)

Monitor Cable

Monitor Cable

- (Optional) Lenovo USB-C to DisplayPort Adapter
- (Optional) Lenovo HDMI to VGA Monitor Adapter
- (Optional) Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

No smart card reader

Fingerprint Reader

Touch style fingerprint reader on power button, match-on-chip

BIOS Security

- Power-on password
- Supervisor password
- NVMe password
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro Enterprise
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty^{**[1]}

- 1-year depot service
- 1-year courier with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Sustainability

Material

Low-temperature solder
90% recycled and/or sustainable packaging

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories

- Lenovo USB-C to Ethernet Adapter (1Gbps)
- Lenovo USB-C to Ethernet Adapter (2.5Gbps)
- None

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

Other Certifications

TÜV Rheinland® Low Blue Light

ISV Certifications

ISV Certifications

Please visit [ISV certifications for Lenovo Workstations](#)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

