


OVERVIEW

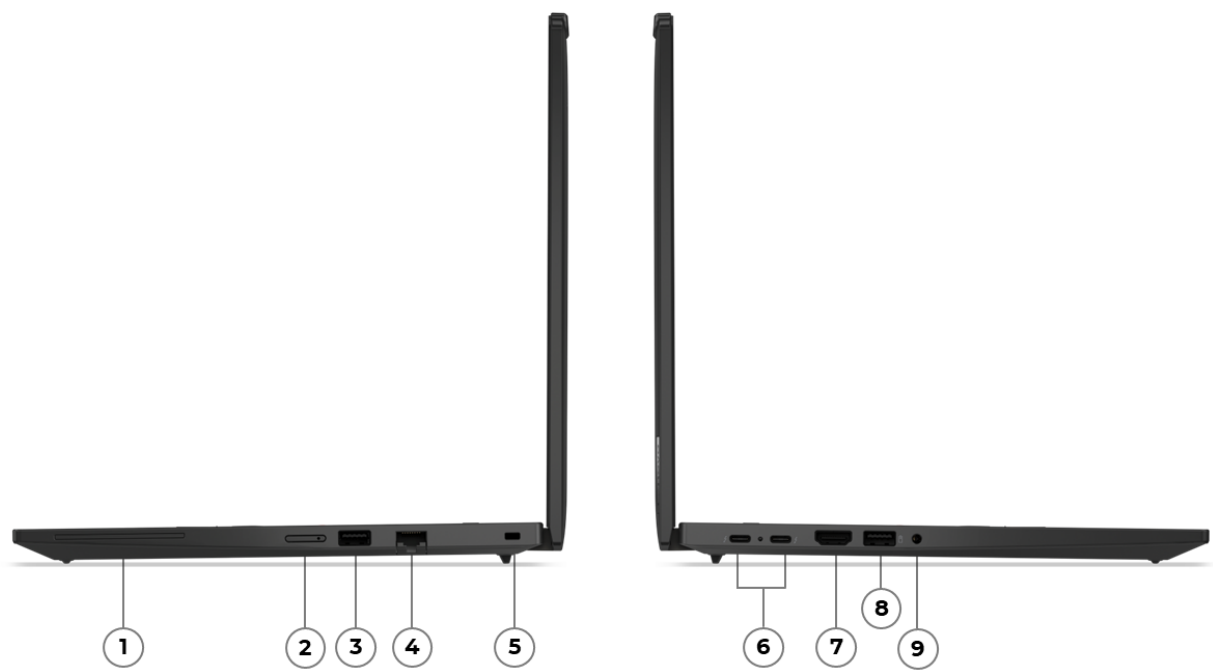

1. Smart card reader *	6. 2x Thunderbolt 4
2. Nano-SIM card slot *	7. HDMI
3. USB-A (USB 5Gbps)	8. USB-A (USB 5Gbps), Always On
4. Ethernet (RJ-45)	9. Headphone / microphone combo jack (3.5mm)
5. Kensington Nano Security Slot	

- Notes:
- Items with \* are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® V, U or H Series Core Ultra 5 / 7 Processor (Series 2)

Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Overall TOPS
Core Ultra 5 225H	14 (4 P-core + 8 E-core + 2 LPE-core)	14	P-core 1.7GHz / E-core 1.3GHz / LPE-core 700MHz	P-core 4.9GHz / E-core 4.3GHz / LPE-core 2.5GHz	18MB	Intel® Arc™ 130T GPU, up to 63 TOPS <sup>[1]</sup>	Intel® AI Boost, up to 13 TOPS	Up to 83 TOPS
Core Ultra 5 225U	12 (2 P-core + 8 E-core + 2 LPE-core)	14	P-core 1.5GHz / E-core 1.3GHz / LPE-core 700MHz	P-core 4.8GHz / E-core 3.8GHz / LPE-core 2.4GHz	12MB	Intel® Graphics	Intel® AI Boost, up to 12 TOPS	-
Core Ultra 5 228V	8 (4 P-core + 4 LPE-core)	8	P-core 2.1GHz / LPE-core 2.1GHz	P-core 4.5GHz / LPE-core 3.5GHz	8MB	Intel® Arc™ Graphics 130V, up to 53 TOPS	Intel® AI Boost, up to 40 TOPS	Up to 97 TOPS
Core Ultra 5 235H	14 (4 P-core + 8 E-core + 2 LPE-core)	14	P-core 2.4GHz / E-core 1.8GHz / LPE-core 700MHz	P-core 5.0GHz / E-core 4.4GHz / LPE-core 2.5GHz	18MB	Intel® Arc™ 140T GPU, up to 74 TOPS <sup>[2]</sup>	Intel® AI Boost, up to 13 TOPS	Up to 94 TOPS
Core Ultra 5 235U	12 (2 P-core + 8 E-core + 2 LPE-core)	14	P-core 2.0GHz / E-core 1.6GHz / LPE-core 700MHz	P-core 4.9GHz / E-core 4.1GHz / LPE-core 2.4GHz	12MB	Intel® Graphics	Intel® AI Boost, up to 12 TOPS	-
Core Ultra 5 238V	8 (4 P-core + 4 LPE-core)	8	P-core 2.1GHz / LPE-core 2.1GHz	P-core 4.7GHz / LPE-core 3.5GHz	8MB	Intel® Arc™ Graphics 130V, up to 53 TOPS	Intel® AI Boost, up to 40 TOPS	Up to 97 TOPS
Core Ultra 7 255H	16 (6 P-core + 8 E-core + 2 LPE-core)	16	P-core 2GHz / E-core 1.5GHz / LPE-core 700MHz	P-core 5.1GHz / E-core 4.4GHz / LPE-core 2.5GHz	24MB	Intel® Arc™ 140T GPU, up to 74 TOPS <sup>[3]</sup>	Intel® AI Boost, up to 13 TOPS	Up to 96 TOPS
Core Ultra 7 255U	12 (2 P-core + 8 E-core + 2 LPE-core)	14	P-core 2GHz / E-core 1.7GHz / LPE-core 700MHz	P-core 5.2GHz / E-core 4.2GHz / LPE-core 2.4GHz	12MB	Intel® Graphics	Intel® AI Boost, up to 12 TOPS	-
Core Ultra 7 258V	8 (4 P-core + 4 LPE-core)	8	P-core 2.2GHz / LPE-core 2.2GHz	P-core 4.8GHz / LPE-core 3.7GHz	12MB	Intel® Arc™ Graphics 140V, up to 64 TOPS	Intel® AI Boost, up to 47 TOPS	Up to 115 TOPS
Core Ultra 7 265H	16 (6 P-core + 8 E-core + 2 LPE-core)	16	P-core 2.2GHz / E-core 1.7GHz / LPE-core 700MHz	P-core 5.3GHz / E-core 4.5GHz / LPE-core 2.5GHz	24MB	Intel® Arc™ 140T GPU, up to 75 TOPS <sup>[4]</sup>	Intel® AI Boost, up to 13 TOPS	Up to 97 TOPS
Core Ultra 7 265U	12 (2 P-core + 8 E-core + 2 LPE-core)	14	P-core 2.1GHz / E-core 1.7GHz / LPE-core 700MHz	P-core 5.3GHz / E-core 4.2GHz / LPE-core 2.4GHz	12MB	Intel® Graphics	Intel® AI Boost, up to 12 TOPS	-
Core Ultra 7 268V	8 (4 P-core + 4 LPE-core)	8	P-core 2.2GHz / LPE-core 2.2GHz	P-core 5GHz / LPE-core 3.7GHz	12MB	Intel® Arc™ Graphics 140V, up to 66 TOPS	Intel® AI Boost, up to 48 TOPS	Up to 118 TOPS

Notes:

[1], [2], [3], [4] Intel® Arc™ graphics only available on select H-series Intel® Core™ Ultra processor powered systems with at least 16GB of system memory in a dual-channel configurations, otherwise it will function as Intel® Graphics.

AI (Artificial Intelligence)

AI PC Category\*\*

- AI PC (models with U or H series processor)<sup>[1]</sup>

- Copilot+ PC (models with V series processor)<sup>[2]</sup>

**NPU**

Integrated Intel® AI Boost, up to 48 TOPS

Notes:

[1] AI PCs have a NPU capable of 10+ TOPs to run the Copilot assistant by pressing the optional Microsoft® Copilot key or using Win + C.

[2] Copilot+ PCs have at least 16GB RAM, 256GB storage, and a NPU that runs 40+ TOPs to run the latest AI tools build-in latest Windows® 11 to accelerate productivity and creativity.

Operating System

Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Fedora Linux<sup>[1]</sup>
- Ubuntu Linux<sup>[2]</sup>
- Linux<sup>[3]</sup>
- No preload operating system

Notes:

[1], [2], [3] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics\*\*

Graphics	Type	Memory	TGP	Key Features
Intel® Arc™ 130T GPU <sup>[1]</sup>	Integrated	Shared	Share CPU TDP	DirectX® 12.2
Intel® Arc™ 140T GPU <sup>[2]</sup>	Integrated	Shared	Share CPU TDP	DirectX® 12.2
Intel® Arc™ Graphics 130V	Integrated	Shared	Share CPU TDP	DirectX® 12.2
Intel® Arc™ Graphics 140V	Integrated	Shared	Share CPU TDP	DirectX® 12.2
Intel® Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.2

Notes:

[1], [2] Intel® Arc™ graphics only available on select H-series Intel® Core™ Ultra processor powered systems with at least 16GB of system memory in a dual-channel configurations, otherwise it will function as Intel® Graphics.

Monitor Support

Monitor Support<sup>[1]</sup>

Models with U or H series processor: supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)

Models with V series processor: supports up to 3 independent displays (native display and 2 external monitors via HDMI® and Thunderbolt™)

- HDMI® supports up to 4K@60Hz
- Thunderbolt™ supports up to 8K@60Hz<sup>[2]</sup>

Notes:

[1] Refresh rates >60hz also supported, however max resolution will be limited.

[2] 8K resolution support needs 2 display pipes. That is, simultaneous display number will “-1” when 8K resolution displayed.

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory<sup>[1]</sup>

- Models with U or H series processor: up to 64GB DDR5-5600
- Models with V series processor: 32GB soldered memory, not upgradable

Memory Slots\*\*

- Models with V series processor: memory soldered to systemboard, no slots, dual-channel
- Models with U or H series processor: two DDR5 SODIMM / CSODIMM slots, dual-channel capable

Memory Type\*\*

- Models with U or H series processor: DDR5-5600
- Models with V series processor: LPDDR5x-8533, MoP (Memory on Package) memory

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Max Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

Storage Slot

- Models with U series processor: one M.2 2280 PCIe® 4.0 x4 slot
- Models with V or H series processor: one M.2 2280 PCIe® 5.0 x4 slot

Storage Type\*\*

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	512GB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 5.0 x4 Performance <sup>[2]</sup>	512GB / 1TB / 2TB	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] PCIe® 5.0 x4 SSD is downgraded to PCIe® 4.0 x4 performance on the models with U series processor.

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby Audio™

Microphone

- Dual-microphone array, 360° far-field, Dolby Voice®
- No microphone<sup>[1]</sup>

Camera\*\*

- 5.0MP + IR discrete, with privacy shutter, fixed focus, temporal noise reduction
- 5.0MP, with privacy shutter, fixed focus, temporal noise reduction
- No camera<sup>[2]</sup>

Notes:

[1] No microphone is for special bid only.

[2] No camera is for special bid only.

Battery

Battery\*\*

- 52.5Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr)

- 57Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr)

**Battery Life**<sup>[1]</sup>

Configuration 1 (max battery life)  
MobileMark® 25: up to 18.76 hr with 821 performance score @250nits  
JEITA-BAT 3.0 (Video/Idle): up to 11.2 hr / 33.8 hr @200nits  
Local video playback: up to 30 hr @150nits

Alternate configuration 2  
MobileMark® 25: up to 12.9 hr with 511 performance score @250nits  
JEITA-BAT 3.0 (Video/Idle): up to 11.9 hr / 26.4 hr @200nits  
Local video playback: up to 20.82 hr @150nits

Alternate configuration 3  
MobileMark® 25: up to 12.3 hr with 696 performance score @250nits  
JEITA-BAT 3.0 (Video/Idle): up to 11.45 hr / 28.7 hr @200nits  
Local video playback: up to 20.2 hr @150nits

Notes:

[1] Configuration 1 (max battery life): WUXGA low power (non-touch), Intel® Core™ Ultra 5 228V, 32GB LPDDR5x-8533, Win 11, 57Wh battery, best power efficiency power mode  
Alternate configuration 2: WUXGA low power (non-touch), Intel® Core™ Ultra 5 225U, 8GB DDR5, Win 11, 52.5Wh battery, best power efficiency power mode  
Alternate configuration 3: WUXGA low power (non-touch), Intel® Core™ Ultra 5 225H, 8GB DDR5, Win 11, 52.5Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 25](#), JEITA 3.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.  
Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.  
The maximum capacity of the battery will decrease with time, ambient temperature and use.  
Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

**Power Adapter**

**Power Adapter**<sup>\*\*[1]</sup>

- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® nano GaN (2-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® nano GaN (3-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim GaN (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim GaN (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter<sup>[2]</sup>

Notes:

[1] AC adapter offerings depend on the country.  
[2] No power adapter is for special bid only.

**DESIGN**

**Display**

**Display**<sup>\*\*[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
14"	WUXGA (1920x1200)	On-cell touch	IPS <sup>[2]</sup>	400nits	Anti-glare	16:10	1000:1	45% NTSC	60Hz	89° / 89° / 89° / 89°	Eyesafe® Certified 2.0, 3M™ DBEF5
14"	WUXGA (1920x1200)	Non-touch	IPS <sup>[3]</sup>	400nits	Anti-glare	16:10	1000:1	45% NTSC	60Hz	89° / 89° / 89° / 89°	3M™ DBEF5

14"	WUXGA (1920x1200)	Non-touch	IPS <sup>[4]</sup>	500nits	Anti-glare	16:10	1000:1	100% sRGB	60Hz	85° / 85° / 85° / 85°	Low power, Eyesafe® Certified 2.0
14"	WUXGA (1920x1200)	On-cell touch	IPS <sup>[5]</sup>	500nits	Anti-glare	16:10	1500:1	100% sRGB	60Hz	89° / 89° / 89° / 89°	ThinkPad® Privacy Guard
14"	2.8K (2880x1800) <sup>[6]</sup>	Add On Film Touch	OLED	500nits	Anti-glare, Anti-reflection, anti-smudge	16:10	100,000:1	100% DCI-P3	120Hz VRR	85° / 85° / 85° / 85°	DisplayHDR™ True Black 500, Dolby Vision®, Eyesafe® Certified 2.0

Touchscreen\*\*

- Add-on Film Touch, supports 10-point touch
- On-cell multi-touch, supports 10-point touch
- Non-touch

Screen-to-Body Ratio

85.73%

Notes:

- [1] 3M™ DBEF5 (Dual Brightness Enhancement Film) improves the experience with higher brightness and lower energy.
- [2], [3], [4], [5] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.
- [6] 2.8K display is only available for the models with U or H series processor.

Input Device

Pen

No support

Keyboard

6-row, spill-resistant, multimedia Fn keys, key travel 1.5mm / 1.35mm (Fn row & G/H/B), Copilot key

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device, double-tap to open the TrackPoint® Quick Menu  
Glass-like Mylar® surface multi-touch 3-button Trackpad, 61 x 115 mm (2.40 x 4.53 inches)

Mechanical

Dimensions (WxDxH)<sup>[1]</sup>

Models	Dimensions
Non-WWAN models	315.9 x 223.7 x 10.9/16.13 (front/rear), 21.8 (maximum) mm; 12.44 x 8.81 x 0.43/0.64 (front/rear), 0.86 (maximum) inches
WWAN support models	315.9 x 223.7 x 10.9/16.13 (front/rear), 21.95 (maximum) mm; 12.44 x 8.81 x 0.43/0.64 (front/rear), 0.86 (maximum) inches

Weight<sup>[2]</sup>

Models	Weight
Models with grey cover and 52.5Wh battery	Starting at 1.59 kg (3.51 lbs)
Models with black cover and 57Wh battery	Starting at 1.38 kg (3.05 lbs)
Models with grey cover and 57Wh battery	Starting at 1.51 kg (3.35 lbs)
Models with black cover and 52.5Wh battery	Starting at 1.46 kg (3.22 lbs)

Case Color\*\*

- Black
- Grey

Case Material\*\*

- Models with black cover: PC + 20% CF (top), PC + 20% CF (bottom)
- Models with grey cover: aluminium (top), PC + 20% CF (bottom)

---

**Notes:**

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

#### WLAN + Bluetooth®\*\*[1]

- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3[2]
- Intel® Wi-Fi® 7 BE201, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4[3]

#### WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)
- Wireless WAN upgradable to 5G (with antenna ready)
- Quectel EM061K-GL, 4G LTE CAT6, M.2 card, with embedded eSIM functionality
- Quectel EM160R-GL, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- Quectel RM520N-GL, 5G Sub-6 GHz, M.2 card, with embedded eSIM functionality
- No support

#### SIM Card

- KDDI eSIM Program (Japan)[4]
- No physical SIM card inbox

#### Ethernet\*\*

- Gigabit Ethernet, Intel® Ethernet Connection I219-LM (vPro® models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel® Ethernet Connection I219-V (non-vPro® models), 1x RJ-45, supports Wake-on-LAN

#### NFC

- Near Field Communication
- No support

---

**Notes:**

[1] Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[2] Wi-Fi® 6E operation is subject to the regulation rules in each country.

[3] Wi-Fi® 7 operation is subject to the regulation rules in each country.

[4] KDDI eSIM Program is for special bid only.

### Ports<sup>[1]</sup>

#### Standard Ports

- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1), Always On
- 2x USB-C® (Thunderbolt™ 4 / USB4® 40Gbps), with USB PD 3.0 and DisplayPort™ 2.1
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)

#### Optional Ports\*\*\*

- 1x Nano-SIM card slot (WWAN support models)
- 1x Smart card reader

---

**Notes:**

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

### Docking

## Docking

Various docking solutions supported via Thunderbolt™ / USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® T14 Gen 6 \(Intel®\)](#)

# SECURITY & PRIVACY

## Security

### Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-3 certified

### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

### Smart Card Reader

- Smart card reader, supports ISO 7816 and EMV
- No smart card reader

### Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

### BIOS Security

- NVMe® password
- Power-on password
- Supervisor password
- System management password
- Certificate-based BIOS authentication
- FIDO (Fast Identity Online) authentication
- Self-healing BIOS
- More BIOS security features (models with V series processor), please visit [BIOS Simulator](#)<sup>[1]</sup>
- More BIOS security features (models with U or H series processor), please visit [BIOS Simulator](#)<sup>[2]</sup>

### Other Security

- Camera privacy shutter (camera models)
- (Optional) Ultrasonic Human Presence Detection
- (Optional) IR camera for Windows® Hello (facial recognition)
- ThinkShield
- Privacy Guard with Privacy Alert (models with ThinkPad® Privacy Guard display)

#### Notes:

[1], [2] The BIOS simulator is just for reference. Default settings and some options may vary depending on the hardware, operating system and BIOS version.

# MANAGEABILITY

## System Management

### System Management<sup>[1]</sup>

- Intel® vPro® Enterprise<sup>[2]</sup>
- Non-vPro®

#### Notes:

[1] All versions of the Intel® vPro® platform require an eligible Intel® processor, a supported operating system, Intel® LAN and/or WLAN silicon, firmware enhancements, and other hardware and software necessary to deliver the manageability use cases, security features, system performance, and stability that define the platform. See [Intel® vPro® Platform](#) for details.

[2] Intel® vPro® offers a superset of DASH's defined capabilities.

# SERVICE

## Warranty

### Base Warranty\*\*



- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty<sup>[1]</sup>

Notes:

[1] No base warranty is for special bid only.

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories<sup>\*\*\*[1]</sup>

- Lenovo® HDMI® to VGA Monitor Adapter
- Lenovo® USB-C® to DisplayPort™ Adapter
- Lenovo® USB-C® to VGA Adapter
- None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad® T14 Gen 6 \(Intel®\)](#).

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F ) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

#### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ENVIRONMENTAL

### Sustainability

#### Material<sup>[1]</sup>

30% PCC recycled plastic on black top cover  
50% recycled aluminium on grey top cover  
48% PCC recycled plastic used in display panel frame  
90% recycled magnesium on keyboard frame  
48% PCC recycled plastic on bottom cover of WWAN models  
30% PCC recycled plastic on bottom cover of non-WWAN models  
90% PCC recycled plastic used in speaker enclosure  
90% PCC recycled plastic used in the battery frame  
85% PCC recycled plastic for backlit keycaps  
75% PCC recycled plastic for non-backlit keycaps  
65% PCC recycled plastic for keycap frame  
90% PCC recycled plastic used in 65W adapters  
100% Plastic Free One Lenovo® Packaging

Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- ENERGY STAR® 9.0
- EPEAT™ Gold Registered<sup>[3]</sup>
- ErP Lot 6/26
- RoHS compliant
- TCO Certified 10.0

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit [epeat.net](https://epeat.net) and [energystar.gov](https://energystar.gov) for more information.

[3] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

(Optional) Eyesafe® Certified 2.0

- Feature with \*\* means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with \*\*\* means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

