


## OVERVIEW

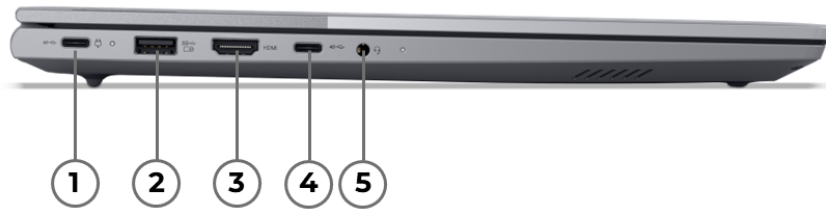

1. USB-C (USB4 40Gbps), USB PD 45-65W & DP1.4a	6. SD card reader
2. USB-A (USB 5Gbps), Always On	7. USB-A (USB 5Gbps)
3. HDMI	8. Ethernet (RJ-45)
4. USB-C (USB4 40Gbps), USB PD 45-65W & DP 1.4a	9. Kensington Nano Security Slot
5. Headphone / microphone combo jack (3.5mm)	

## PERFORMANCE

### Processor

#### Processor Family

AMD Ryzen™ 3 / 5 / 7 200 Series Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Overall TOPS
AMD Ryzen™ 5 220	6	12	3.2GHz	4.9GHz	6MB L2 / 16MB L3	AMD Radeon™ 740M	-	-
AMD Ryzen™ 7 250	8	16	3.3GHz	5.1GHz	8MB L2 / 16MB L3	AMD Radeon™ 780M	AMD Ryzen™ AI, up to 16 TOPS	Up to 38 TOPS
AMD Ryzen™ 3 210	4	8	3.0GHz	4.7GHz	4MB L2 / 8MB L3	AMD Radeon™ 740M	-	-

### AI (Artificial Intelligence)

#### AI PC Category

AI PC (models with AMD Ryzen™ 7 250 processor)<sup>[1]</sup>

#### NPU<sup>[2]</sup>

Integrated AMD Ryzen™ AI, up to 16 TOPS

Notes:

[1] AI PCs have a NPU capable of 10+ TOPs to run the Copilot assistant by pressing the optional Microsoft® Copilot key or using Win + C.

[2] Only for the models with AMD Ryzen™ 7 250 processor.

### Operating System

#### Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- No preload operating system

### Graphics

#### Graphics\*\*

Graphics	Type	Memory	Key Features
AMD Radeon™ 740M	Integrated	Shared	DirectX® 12
AMD Radeon™ 780M	Integrated	Shared	DirectX® 12

### Monitor Support

#### Monitor Support<sup>[1]</sup>

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB4®)

- HDMI® supports up to 4096x2160@60Hz
- USB4® supports up to 5120x2880@60Hz

Notes:

[1] Refresh rates >60hz also supported, however max resolution will be limited.

### Chipset

#### Chipset

AMD SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

Up to 64GB DDR5-5600

### Memory Slots

Two DDR5 SODIMM slots, dual-channel capable

### Memory Type

DDR5-5600

Notes:

[1] Maximum memory 64GB DDR5-5600 is only to test technical readiness of notebook. Available memory to sell would vary.

## Storage

### Max Storage Support<sup>[1]</sup>

Up to two drives, 2x M.2 SSD

- M.2 2242 SSD up to 2TB
- M.2 2280 SSD up to 2TB

### Storage Slot<sup>[2]</sup>

Two M.2 slots

- One M.2 2242 PCIe® 4.0 x4 slot
- One M.2 2280 PCIe® 4.0 x4 slot

### Storage Type

Disk Type	Interface	Offering
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB

Notes:

[1] The system supports dual SSD via two M.2 slots, but Lenovo® offers only one SSD configuration with a second slot for user self-expansion.

The max storage capacity is only technical readiness and may be different from current Lenovo® storage offerings.

[2] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.

PCIe® 3.0 (x2 / x4): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps);

PCIe® 4.0 (x2 / x4): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps);

PCIe® 5.0 (x2 / x4): 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps).

## Removable Storage

### Card Reader

SD card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

### Speakers

Stereo speakers, 2W x2, Dolby Audio™

### Microphone

Dual-microphone array with smart noise-cancelling

### Camera\*\*

- 5.0MP, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus

## Battery

### Battery\*\*

- 48Wh Rechargeable Li-ion Battery, supports Rapid Charge Pro (charge up to 50% in 30min)<sup>[1]</sup>
- 71Wh Rechargeable Li-ion Battery

### Battery Life<sup>[2]</sup>

Configuration 1

MobileMark® 30: up to 13.68 hr @250nits

Local video playback: up to 18.53 hr @150nits

Configuration 2

MobileMark® 30: up to 10.03 hr @250nits

Local video playback: up to 13.51 hr @150nits

Notes:

[1] Rapid charge is only guaranteed when the computer is turned off or in standby mode or in hibernation mode. When the computer is powered on, the Charge Time will vary depending on system power consumption and AC adapter power.

[2] Configuration 1: WUXGA (non-touch), AMD Ryzen™ 7 250, 16GB DDR5, Win 11, 71Wh battery, best power efficiency power mode

Configuration 2: WUXGA (non-touch), AMD Ryzen™ 5 220, 16GB DDR5, Win 11, 48Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 30](#), continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level).

Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

## Power Adapter

### Power Adapter\*\*[1]

- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (2-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

[1] AC adapter offerings depend on the country.

## Special Features

### Special Features

Modern Standby

## DESIGN

### Display

#### Display\*\*

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
16"	WUXGA (1920x1200)	Non-touch	IPS <sup>[1]</sup>	400nits	Anti-glare	16:10	1000:1	45% NTSC	60Hz	89° / 89° / 89° / 89°	TÜV Rheinland® Low Blue Light (Software)
16"	WUXGA (1920x1200)	In-cell touch	IPS <sup>[2]</sup>	400nits	Anti-glare	16:10	1200:1	100% sRGB	120Hz	89° / 89° / 89° / 89°	Eyesafe® Certified 2.0
16"	WQXGA (2560x1600)	Non-touch	IPS <sup>[3]</sup>	400nits	Anti-glare	16:10	1200:1	100% sRGB	120Hz	89° / 89° / 89° / 89°	Eyesafe® Certified 2.0, TCON

### Touchscreen

- In-cell multi-touch, supports 10-point touch
- Non-touch

### Screen-to-Body Ratio

90%

### Color Calibration

- TCON (Timing Controller) color calibration
- No color calibration

---

Notes:

[1], [2], [3] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

## Input Device

### Pen

No support

### Keyboard

6-row, spill-resistant, multimedia Fn keys, numeric keypad, key travel 1.5mm, Copilot key

### Keyboard Backlight

- LED backlight
- Non-backlight

### Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 75 x 120 mm (2.95 x 4.72 inches)

## Mechanical

### Dimensions (WxDxH)<sup>[1]</sup>

356 x 253.5 x 17.5 mm (14.01 x 9.98 x 0.69 inches)

### Weight<sup>[2]</sup>

Starting at 1.7 kg (3.75 lbs)

### Case Color\*\*

- Arctic grey, dual-tone design
- Cosmic blue, dual-tone design

### Case Material

Aluminium (top), PC-ABS (bottom)

### Surface Treatment

Anodizing sandblasting (top), texture (bottom)

---

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

#### WLAN + Bluetooth®\*\*<sup>[1]</sup>

- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 card
- Wi-Fi® 7, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, M.2 card

#### WWAN

No support

#### Ethernet<sup>[2]</sup>

Gigabit Ethernet, 1x RJ-45, supports Wake-on-LAN

---

Notes:

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[2] Wake-on-LAN needs the power adapter plugged in.

### Ports<sup>[1]</sup>

## Standard Ports

- 1x USB-A (USB 5Gbps), Always On
- 1x USB-A (USB 5Gbps)
- 2x USB-C® (USB4® 40Gbps), with USB PD 45-65W and DisplayPort™ 1.4a
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)
- 1x SD card reader

### Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

## Docking

### Docking

Various docking solutions supported via USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkBook® 16 G9 AHP](#)

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-3 certified

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

#### Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

#### BIOS Security

- Hard disk password
- Power-on password
- Supervisor password
- User password
- Self-healing BIOS
- More BIOS security features, please visit [BIOS Simulator](#)

#### Other Security

- Camera privacy shutter
- (Optional) IR camera for Windows® Hello (facial recognition)

## SERVICE

### Warranty

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 2-year (1-yr battery) courier or carry-in service
- No base warranty

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories\*\*\*[1]

- Lenovo® 16" Laptop ECO Topload T210 (black)
- Lenovo® Essential Wired Mouse (Plastic Free)
- Lenovo® USB-A Wired Stereo Headset Gen 2 (Plastic Free)
- ThinkBook® Bluetooth® Silent Mouse (Plastic Free)

- None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkBook® 16 G9 AHP](#).

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature<sup>[1]</sup>

- At altitudes up to 2438 m (8,000 ft)
  - Operating: 5°C to 35°C (41°F to 95°F)
  - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
  - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

#### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ENVIRONMENTAL

### Sustainability

#### Material<sup>[1]</sup>

30% PCC recycled plastic used in the battery pack enclosure  
50% PCC recycled plastic used in key caps  
30% PCC recycled plastic used in speaker  
90% PCC recycled plastic used in standard 65W adapter  
Plastic free packaging (for EMEA & NA)  
Dry pressed pulp cushion  
90% recycled content in OBP bag or bamboo fiber bag  
FSC certified content in carton box

Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- ENERGY STAR® 9.0
- EPEAT™ Gold Registered<sup>[3]</sup>
- ErP Lot 6/26
- RoHS compliant
- TCO Certified, generation 10

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit [epeat.net](http://epeat.net) and [energystar.gov](http://energystar.gov) for more information.

[3] EPEAT™ is registered where applicable, please visit [epeat.net](http://epeat.net) for registration status by country.

### Other Certifications

## Mil-Spec Test

MIL-STD-810H military test passed

## Other Certifications

- (Optional) Eyesafe® Certified 2.0
  - (Optional) TÜV Rheinland® Low Blue Light (Hardware Solution)
  - (Optional) TÜV Rheinland® Low Blue Light (Software Solution)
- 
- Feature with \*\* means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
  - Feature with \*\*\* means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
  - Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS", WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
  - The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD



AMD



AMD



AMD



AMD